

PIX-LR

Audio Interface for PIX-E Series



VIDEO DEVICES
www.videodevices.com

FC CE
Part # 5786.002

VIDEO DEVICES

Welcome

Thank you for purchasing the Video Devices PIX-LR audio interface.

The PIX-LR is a screw-on accessory that provides the PIX-E Series of recording field monitors with XLR inputs and outputs, Sound Devices-caliber mic preamps, accurate LED metering, and dedicated transport and gain controls.


Included with your purchase:

- 1 - PIX-LR
- 1 - Hex key or Allen wrench
- 1 PIX-LR Quick Start Guide

Inputs and Outputs

On its back panel, the PIX-LR has two XLR-3F connections for active-balanced, analog microphone- or line-level inputs (1 and 2). [Pin-1 ground; pin-2 (+); pin-3 (-)]

The back panel also features two standard, 3-pin XLR-3M connections for balanced, analog outputs. [Pin-1 ground; pin-2 hot (+); pin-3 cold (-)]

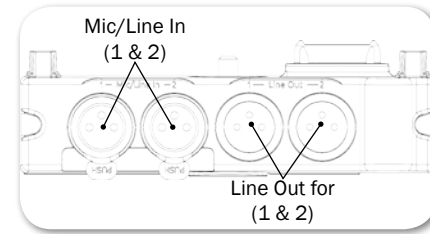

Attaching the PIX-LR


The PIX-LR may be attached to the bottom panel of the PIX-E5, PIX-E5H, or PIX-E7. Regardless of which monitor is used, the procedure for attaching the PIX-LR is the same.

To attach your PIX-LR:

1. Ensure the monitor is off.
2. Remove the protective cover on the monitor's bottom panel, using a small flat tool. (A jeweler's screwdriver works well.) The protective cover is attached with adhesive.
3. Properly position the PIX-LR, aligning its multi-pin connector with the monitor's port, and also aligning the screw on the accessory with the 1/4 inch,


stainless-steel threaded mounting point, on the bottom of the monitor.

4. Insert the hex key (also known as an Allen wrench, included with the PIX-LR) in the bottom of the PIX-LR and tighten the screw.

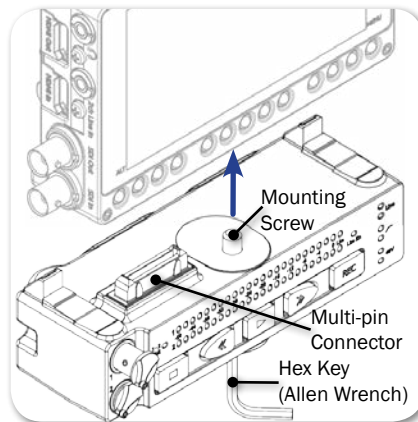

Front Panel

The front panel of the PIX-LR has track level meter LEDs for channels 1 and 2, plus large, back-lit transport controls for Stop, Rewind, Play, Fast Forward, and Record.

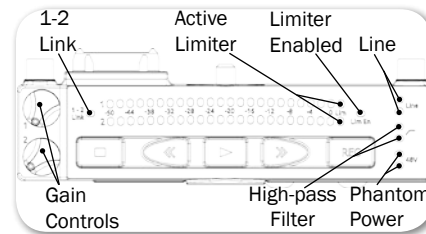

It also offers two dedicated gain controls and several additional LED indicators, for the following features:

LED	Description
1-2 Link	Indicates channels 1 and 2 are linked as a stereo pair.
Active Limiter	Illuminates when limiting occurs.
Limiter Enabled	Illuminates when limiter is enabled.
Line	Illuminates when inputs are set to line level; It remains off when set to Mic.
High-pass Filter	Illuminates when the high-pass filter is active for the input(s).
Phantom Power	Illuminates when phantom power (48 V) is active for the input(s).

Powering the PIX-LR

The PIX-LR derives its power from the monitor to which it is attached.

To power on the PIX-LR:

- ▶ Turn on the monitor.

The monitor offers additional settings related to the attached PIX-LR.

To access PIX-LR settings:

1. Press the MENU button on the monitor to access the Main menu.
2. Select Audio. Settings include: XLR1 & 2 48V Phantom, Analog XLR 1 & 2 Low Cut, Input Linking, Input Limiter, XLR Output Source, and XLR 1 & 2 Output Attenuation.

See the *PIX-LR User Guide* online for more information on these settings.

Specifications

- Powered by the monitor
- Size: 1.3 in x 5.4 in x 2.1 in (HxWxD)
- Weight: 8.0 oz

Register Your PIX-LR

Sound Devices strongly encourages you to register your product. Registration ensures you will receive timely product updates.



[www.videodevices.com/
support/registration/](http://www.videodevices.com/support/registration/)

For more on this and other products, visit us at: www.videodevices.com.

Warranty

Sound Devices, LLC warrants the PIX-LR against defects in materials and workmanship for a period of ONE (1) year from date of original retail purchase. Users who register their product directly with Sound Devices Technical Support by mail, online, or phone, will receive an additional ONE (1) year of warranty coverage, extending the complete warranty period to TWO (2) years from the date of original retail purchase. In order to extend the warranty coverage period, registration must be completed within the initial ONE (1) year warranty period. Products must be purchased through authorized Sound Devices resellers to qualify for Warranty coverage. Damage resulting from the opening of a Sound Devices product or attempted repairs by a non-authorized Sound Devices repair technician will void warranty coverage.

This is a non-transferable warranty that extends only to the original purchaser. Sound Devices, LLC will repair or replace the product at its discretion at no charge. Warranty claims due to severe service conditions will be addressed on an individual basis.

THE WARRANTY AND REMEDIES SET FORTH ABOVE ARE EXCLUSIVE. SOUND DEVICES, LLC DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SOUND DEVICES, LLC IS NOT RESPONSIBLE FOR SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY OR UNDER ANY OTHER LEGAL THEORY. Because some jurisdictions do not permit the exclusion or limitations set forth above, they may not apply in all cases.

Limitation of Liability

LIMITATION ON SOUND DEVICES' LIABILITY. SOUND DEVICES, LLC SHALL NOT BE LIABLE TO THE PURCHASER OF THIS PRODUCT OR THIRD PARTIES FOR DAMAGES, LOSSES, COSTS, OR EXPENSES INCURRED BY PURCHASER OR THIRD PARTIES AS A RESULT OF: ACCIDENT, MISUSE, OR ABUSE OF THIS PRODUCT OR UNAUTHORIZED MODIFICATIONS, REPAIRS, OR ALTERATIONS TO THIS PRODUCT, OR FAILURE TO STRICTLY COMPLY WITH SOUND DEVICES, LLC'S OPERATING AND INSTALLATION INSTRUCTIONS. TO THE FULLEST EXTENT PERMITTED BY LAW, SOUND DEVICES SHALL HAVE NO LIABILITY TO THE END USER OR ANY OTHER PERSON FOR COSTS, EXPENSES, DIRECT DAMAGES, INCIDENTAL DAMAGES, PUNITIVE DAMAGES, SPECIAL DAMAGES, CONSEQUENTIAL DAMAGES OR OTHER DAMAGES OF ANY KIND OR NATURE WHATSOEVER ARISING OUT OF OR RELATING TO THE PRODUCTS, THESE TERM/S AND CONDITIONS OR THE PARTIES' RELATIONSHIP, INCLUDING, WITHOUT LIMITATION, DAMAGES RESULTING FROM OR RELATED TO THE DELETION OR OTHER LOSS OF AUDIO OR VIDEO RECORDINGS OR DATA, REDUCED OR DIMINISHED AUDIO OR VIDEO QUALITY OR OTHER SIMILAR AUDIO OR VIDEO DEFECTS ARISING FROM, RELATED TO OR OTHERWISE ATTRIBUTABLE TO THE PRODUCTS OR THE END USER'S USE OR OPERATION THEREOF, REGARDLESS OF WHETHER SUCH DAMAGES ARE CLAIMED UNDER CONTRACT, TORT OR ANY OTHER THEORY. "CONSEQUENTIAL DAMAGES" FOR WHICH SOUND DEVICES SHALL NOT BE LIABLE SHALL INCLUDE, WITHOUT LIMITATION, LOST PROFITS, PENALTIES, DELAY DAMAGES, LIQUIDATED DAMAGES AND OTHER DAMAGES AND LIABILITIES WHICH END USER SHALL BE OBLIGATED TO PAY OR WHICH END USER OR ANY OTHER PARTY MAY INCUR RELATED TO OR ARISING OUT OF ITS CONTRACTS WITH ITS CUSTOMERS OR OTHER THIRD PARTIES. NOTWITHSTANDING AND WITHOUT LIMITING THE FOREGOING, IN NO EVENT SHALL SOUND DEVICES BE LIABLE FOR ANY AMOUNT OF DAMAGES IN EXCESS OF AMOUNTS PAID BY THE END USER FOR THE PRODUCTS AS TO WHICH ANY LIABILITY HAS BEEN DETERMINED TO EXIST. SOUND DEVICES AND END USER EXPRESSLY AGREE THAT THE PRICE FOR THE PRODUCTS WAS DETERMINED IN CONSIDERATION OF THE LIMITATION ON LIABILITY AND DAMAGES SET FORTH HEREIN AND SUCH LIMITATION HAS BEEN SPECIFICALLY BARGAINED FOR AND CONSTITUTES AN AGREED ALLOCATION OF RISK WHICH SHALL SURVIVE THE DETERMINATION OF ANY COURT OF COMPETENT JURISDICTION THAT ANY REMEDY HEREIN FAILS OF ITS ESSENTIAL PURPOSE.

Service

For all service, including warranty repair, please contact Sound Devices for a Return Merchandise Authorization (RMA) number before sending your device in for repair. Product returned without an RMA number may experience delays in repair. Sound Devices repairs and replacements may be completed using refurbished, returned, or used parts that have been factory certified as functionally equivalent to new parts.

Sound Devices, LLC

Service Repair RMA #XXXXX
E7556 State Road 23 and 33
Reedsburg, WI 53959 USA
Telephone: (608) 524-0625



Technical Support / Bug Reports

For technical support and bug reporting on all Video Devices products contact Sound Devices, LLC at:

Email: support@sounddevices.com

Website: sounddevices.com/support

Call Support: 1-608-524-0625

1-800-505-0625

Legal Notes

Video Devices is a brand manufactured by Sound Devices, LLC. Product specifications and features are subject to change without prior notification.

Copyright © 2016
Sound Devices, LLC.
All rights reserved.

This document is protected under copyright law. An authorized licensee of this product may reproduce this publication for the licensee's own personal use. This document may not be reproduced or distributed, in whole or in part, for commercial purposes, such as selling copies or providing educational services or support.

Distributed by Sound Devices, LLC, this document is supplied as a technical guide. Special care has been taken in preparing the information for publication; however, since product specifications are subject to change, this document might contain omissions and technical or typographical inaccuracies. Sound Devices, LLC does not accept responsibility for any losses due to the use of this guide.

Printed in the USA.

Trademarks

The "wave" logo and is a registered trademark of Sound Devices, LLC.